



**AP
1224**

24FE+2Gigabit 48V Ports PoE Switch with 24-Port PoE

- 24 100Mbps Ports with 24 PoE, 2 Gigabit Ports
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 250W
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 8K entry MAC address table with auto-learning and auto-aging



OVERVIEW

AirPro 26-Port 100Mbps Switch with 24-Port PoE provides seamless network connection. It integrates 10/100Mbps Fast Ethernet network capabilities.

How This Product Works

The 24 Auto-Negotiation RJ45 ports (port-1 to port-24) of the switch support Power over Ethernet (PoE) function. These PoE ports automatically detect and supply power to IEEE 802.3af/at compliant Powered Devices (PDs). In this position, the electrical power is transmitted along with data in one single cable allowing you to expand your network where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

EASY TO USE:

It is easy to use as no specific configuration and installation is required. AP1224 comes with outstanding performance and quality, the 26-Port Gigabit Switch with 24-Port PoE is a great selection for expanding your home or office network.

KEY FEATURES


- 24 100Mbps Ports with 24 PoE, 2 Gigabit Ports
- Supports PoE power up to 30W for each port
- Supports PoE IEEE 802.3af/at compliant PDs
- Internal power adapter supply 250W
- LED indicators for LINK/ACT, Power, PoE Status, 100/1000Mbps
- 8K entry MAC address table with auto-learning and auto-aging

TECHNICAL SPECIFICATIONS

Hardware	
Data interface	24*100M POE+2 Gigabit Ports
Network Media	10Base-T: Pair 2 Category 3(Cat3) and above UTP/STP(≤100m) 100Base-TX: Pair 2 Category 5(Cat5) and above UTP/STP(≤100m) 1000Base-T: Pair 4 Category 5(Cat5e) and above UTP/STP(≤100m) 1000Base-SX: 62.5μm/50μm MMF(2m~550m) 1000Base-LX: 62.5μm/50μm MM(2m~550m) or 10μm SMF(2m~5000m)
Fan Quantity	Fan less
Power Consumption	250W (max. with PoE device connected)
External Power Supply	AC 110~265V 50/60HZ
PoE Ports (RJ45)	Standard: 802.3af/at compliant PoE Ports: Port1- Port24 Power Supply: 250W
Exchange Capacity	8.8G
Mac Address Table	8K
Dimensions	Product Size : 440mm*290mm*45mm (L*W*H)

Software	
Transfer Method	Store and Forward
Advanced Functions	Priority Function Mac Address Auto-Learning And Auto-Aging Store and forward IEEE 802.3x flow control for Full-duplex Mode Backpressure for Half-duplex Mode

Others	
Certification	CE, FCC, RoHS
Environment	Working Temperature : 0°C ~ 40°C Storage temperature : -40°C ~ 70°C Working Humidity : 10% ~ 90% RH non-condensing Storage Humidity : 5% ~ 90% RH non-condensing
Package	POE Switch Electric Line Guide Book/Warranty Card 2L Shape Mount + 4Shim

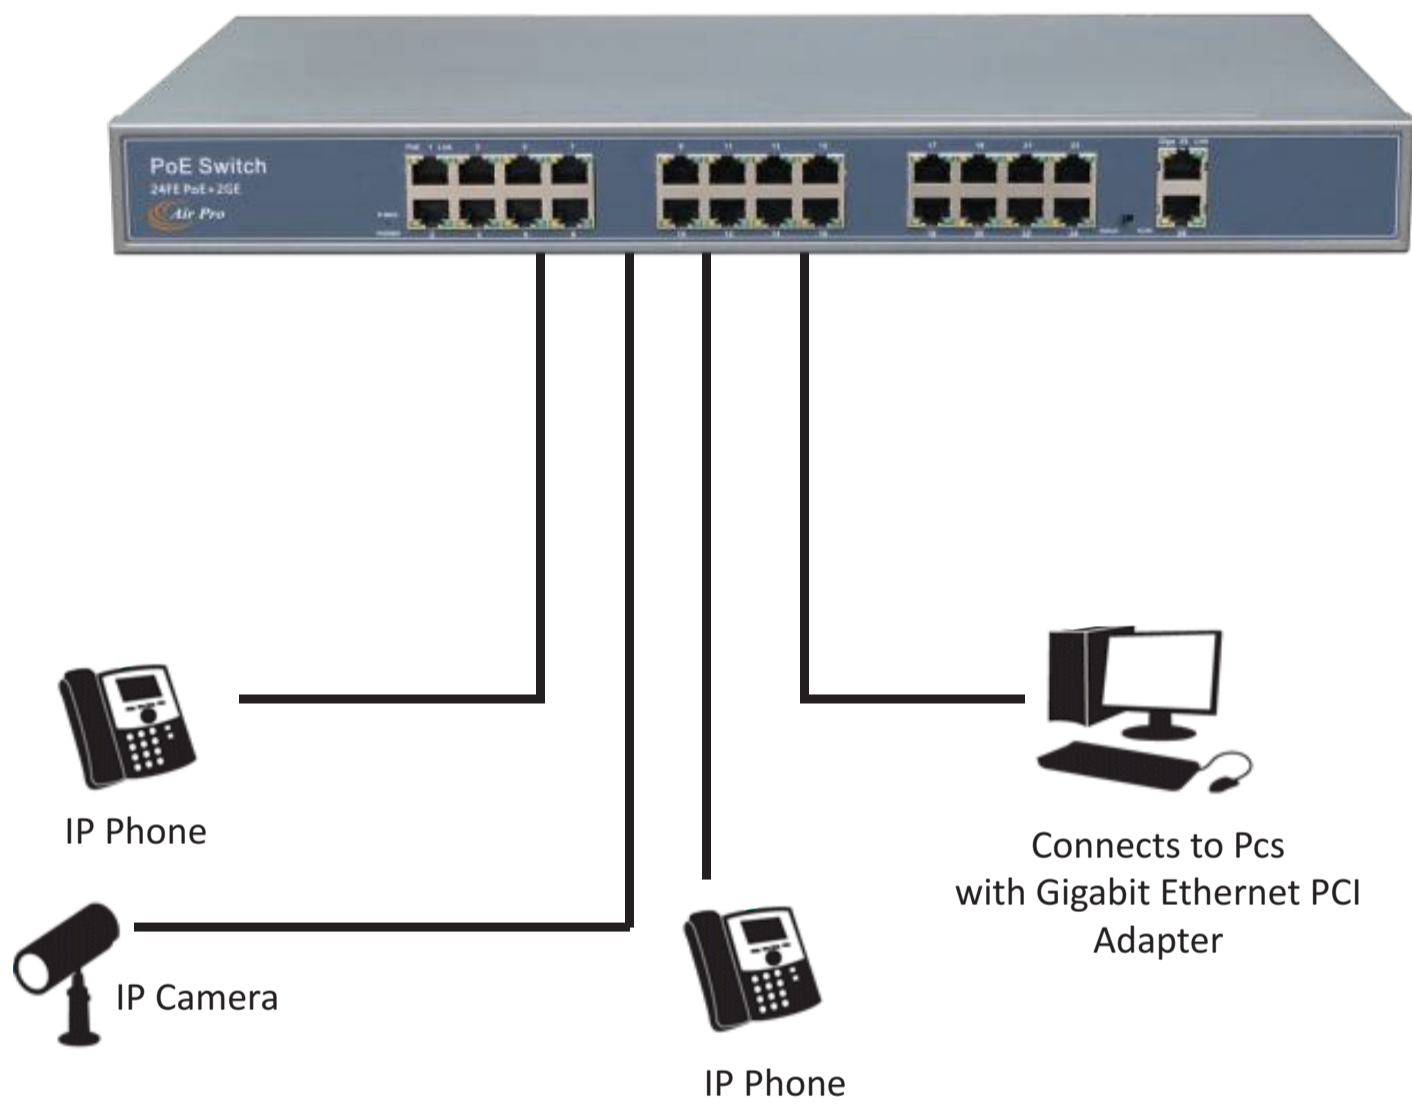

www.airpro.in